

PowerGuide® ShortSpan DT Cable



A Furukawa Company

Totally Gel-Free, ADSS Cable Enables Faster and Less Costly Installation for FTTH and Power Network Deployments

Product Description

If your cable isn't dry, things could get "sticky." Why not join the "Dry Revolution" with our groundbreaking, totally gel-free PowerGuide® ShortSpan DT All-Dielectric, Self-Supporting (ADSS) Loose Tube Cable?

PowerGuide ShortSpan DT Cable helps enable faster deployment and reduced installation costs to offer an ideal, cost-effective solution for short cable spans ranging up to 1,150 feet (350 meters)¹, including FTTH deployments, distribution networks and duct installations.


OFS' field-proven, gel-free loose tube design lies at the heart of each PowerGuide ShortSpan DT Cable. To construct this cable, optical fibers are placed in flexible buffer tubes that contain a specially-engineered, super-absorbent yarn that delivers water blocking "on demand" without the use of messy gels and filling compounds. This patented water-blocking system has been successfully deployed for eight years in our Fortex™ DT Cable product families. Next, the color-coded buffer tubes are stranded around a dielectric central member using the reverse oscillating lay (ROL) stranding technique for easy, mid-span fiber access. Additional dry, super-absorbent material is then applied to the cable core to offer exceptional water-blocking performance and faster cable preparation. Finally, aramid yarn strength elements are added and a robust polyethylene outer jacket is applied to complete the construction of a totally dry, lightweight cable that is durable, reliable and easy to handle and install.

Why the PowerGuide ShortSpan DT Cable?

As the world's first gel-free ADSS cable, PowerGuide ShortSpan DT Cable offers the same high performance and reliability as its gel-filled counterparts. Plus, it's **completely dry**, even inside of the buffer tubes. By eliminating gels and filling compounds, this cable helps enable substantial savings on installation time and labor costs. In fact, when compared with similar gel-filled ADSS cables, PowerGuide ShortSpan DT Cable can help cut cable end preparation time by up to 80%², helping to significantly reduce labor costs for splicing and terminations.

Continued on next page

PowerGuide ShortSpan
DT Cable

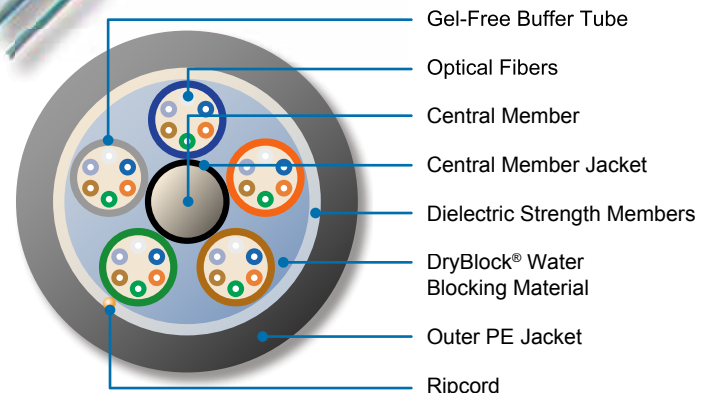

PowerGuide ShortSpan DT Cable
Cross-Section

Features and Benefits:

- Industry-first, gel-free ADSS cable for cleaner, faster and less costly deployments
- Efficient, cost-effective solution for short cable spans ranging up to 1,150 feet (350 meters)¹
- Lighter weight, dry cable helps cut cable end preparation time by up to 80%²

Continued on next page

¹ Maximum span range from 400 feet to 1,150 feet, depending on loading conditions, fiber counts, installation conditions and clearance requirements. Contact OFS for specific details for your application.

² Based on field studies examining the time required to prepare cable ends for splicing and terminations for similar gel-filled ADSS cables as compared with PowerGuide ShortSpan DT Cable.

PowerGuide ShortSpan DT Cable also offers a significantly lower overall cable weight, which results in easier handling and lower operating tensions on the poles. This reduction in cable weight and operating tensions may also enable the use of less costly, lighter duty attachment hardware³, and allows up to a 10% greater span length capability than similar, gel-filled cables⁴. In addition, this lightweight cable is easier to handle and install, creating less of a load on your work crew and plant infrastructure.

The PowerGuide ShortSpan DT Cable's gel-free design also helps save on labor costs by offering faster splicing with higher first pass yields due to a cleaner work environment. By removing nasty gels and filling compounds, this cable allows virtually effortless splice preparation, while keeping your tools, workspace, closures and cabinets cleaner and safer. This cable also enables additional cost savings by helping to minimize or eliminate the need for special cleaning solvents and wipes, along with the expense of cleaning splicer/cleaver equipment. These advantages combine to make PowerGuide ShortSpan DT Cable an "environmentally-friendly" solution that also helps save on deployment time and expense.

In summary, the PowerGuide ShortSpan DT Cable is an outstanding choice for short cable spans including FTTH deployments and distribution networks, and for aerial use (self-supporting), direct use in ducts, aerial-to-duct transitions and aerial-to-underground installations.

Features and Benefits (*continued*):

- Enables significant cost savings from the use of less costly attachment hardware³
- Allows up to a 10% greater span length capability⁵
- Fiber counts up to 144
- Single polyethylene outer jacket for fast, convenient cable preparation (suitable for distribution and low-voltage applications)
- Cleaner work environment helps support faster splicing with higher yields
- Small round profile minimizes wind and ice loading
- Environmentally-friendly cable helps reduce waste and the need for special cleaning solvents
- Single cable outer diameter for fiber counts of 2 to 60 for simplified hardware selection and splicing
- Available with OFS AllWave® Zero Water Peak (ZWP) Single-Mode, TrueWave® RS Low Water Peak (LWP) and multimode fibers
- Highly durable and reliable for short spans including FTTH deployments, distribution networks, direct use in ducts, aerial-to-duct transitions and aerial-to-underground installations

You Can Rely on OFS

PowerGuide ShortSpan DT Cable is the latest OFS innovation to incorporate many of the company's developments in gel-free fiber optic cable design. In 2003, OFS introduced another groundbreaking cable, the award-winning⁵, all-dry Fortex DT Loose Tube Cable⁶. Today, with nearly a decade of field-proven, dry cable performance in the ground and in the air, OFS continues to demonstrate its industry leadership in innovation with the first-to-market, gel-free ADSS cable.

³ For a typical 250-foot cable run, under NESC Medium Loading Conditions, the gel-free cable construction allows for the use of light duty attachment hardware, which costs on average 40% less per pole. Lighter duty and less costly attachment hardware may be used due to lower loading tensions made possible by the lighter weight, gel-free cable design.

⁴ For a typical, gel-free 144-fiber ADSS cable at 500-foot span lengths under NESC Medium Loading Conditions, there can be a gain of up to a 10% increase in span length capability when compared with equivalent strength systems in similar, gel-filled cables.

⁵ Fortex DT Loose Tube Cable was a Fiber Optic Technology 2003 Tech Award Winner.

⁶ Fortex DT Loose Tube Cable was the industry's first gel-free loose tube cable to meet the water-blocking requirements of Telcordia Technologies' GR-20-CORE outside plant standards.



Specifications

Fiber Count		2-60	61-72	73-96	97-120	121-144
Cable Outer Diameter – in. (mm)	CMEA Design	0.47 (11.8)	0.51 (12.8)	0.59 (14.8)	0.67 (16.9)	0.74 (18.6)
	CLGA Design	0.46 (11.7)	0.50 (12.7)	0.58 (14.7)	0.66 (16.8)	0.73 (18.5)
Cable Weight – lb/kft (kg/km)	CMEA Design	64 (95)	67 (99)	91 (135)	120 (178)	144 (214)
	CLGA Design	63 (93)	66 (98)	89 (133)	119 (177)	143 (213)

Performance Standard (all cables)

Tested per Applicable Requirements of Telcordia Technologies GR-20, ANSI/ICEA S-87-640, EIA/TIA, IEEE and RDUP PE-90 (Please contact OFS regarding RDUP Listing).

Handling (all cables)

Minimum Bend Radius, With Load*	15 x OD	Temperature: Installation: -22° F to 158° F (-30° C to 70° C) Operation: -40° F to 158° F (-40° C to 70° C) Storage: -40° F to 167° F (-40° C to 75° C)
Minimum Bend Radius, With No Load*	10 x OD	
Minimum Bend Radius, Storage Coils*	10 x OD	
Maximum Rated Cable Load (MRCL)	Variable	
Maximum Long Term Load	Variable	

* OD = Outer Diameter of Cable

PowerGuide ShortSpan DT ADSS Cable Ordering Information

Example: **AT-3BE17NT-NNN-CMEA¹**

Part Number: AT-		Fiber ²	Sheath	Core	Fiber Count	Custom/Special ³
		<u>S1</u> <u>S2</u> <u>SF</u>	<u>S3</u> <u>S4</u>	<u>S5</u> <u>S6</u>	- <u>NNN</u>	- <u>XXXX</u>
S1 = Fiber Selection		SF = Fiber Type²		S5 = Core Type		
3 = 1310/1550 nm (AllWave® ZWP Fiber)		E = AllWave ZWP Single-Mode Fiber		N = All-Dry ADSS Loose Tube		
6 = 1550 nm (TrueWave® RS LWP Fiber)		6 = TrueWave RS LWP				
R = 850/1300 nm (Multimode Fiber)		9 = 62.5/125 µm Multimode		S6 = Fibers per Tube		
		2 = 50/125 µm Multimode		T = 12 fibers		
S2 = Fiber Transmission Performance		S3 = Sheath Construction		NNN = Fiber Count = 002 – 144		
B = 0.35/0.31/0.27/0.25/0.27 dB/km @ 1310/1385/1490/1550/1625 nm (AllWave ZWP/ AllWave FLEX ZWP)		1 = Single Jacket All-Dielectric				
2 = 0.25 dB/km @ 1550 nm (TrueWave RS LWP)		S4 = Tensile Load		XXXX = CMEA or CLGA (see footnote 3 below)		
U = 3.4/1.0 dB/km and 200/500 MHz-km @ 850/1300 nm (62.5 µm Multimode)		7 = PowerGuide ShortSpan				
K = 2.5/0.7 dB/km and 500/500 MHz-km @ 850/1300 nm (50 µm Multimode)						

¹ Part Number shown is for standard AllWave ZWP attenuation and standard cable print:
Maximum AllWave ZWP attenuation: 0.35/0.31/0.27/0.25/0.27 dB/km (1310/1385/1490/1550/1625 nm)
Standard Print, example for PowerGuide ShortSpan DT Cable:

OFS OPTICAL CABLE AT-3BE17NT-NNN-CMEA [MM-YY] [HANDSET SYMBOL] [NNN]F [SERIAL #]

² Contact OFS Order Management for information on other cable variations, including additional fiber types, attenuation, and custom cable print.

³ **Custom/Special (XXXX)**: Consult with us regarding your application, span lengths, and loading conditions to complete the custom design and part number of your complete sheath strength system.





Use electronic files, available at:
www.ofsoptics.com - Use less paper



AllWave, DryBlock, TrueWave and PowerGuide are registered trademarks and Fortex and FOX Solution are trademarks of OFS FITELE, LLC.

For additional information please contact your sales representative. You can also visit our website at www.ofsoptics.com or call 1-888-fiberhelp (1-888-342-3743) from inside the USA or 1-770-798-5555 from outside the USA.

OFS reserves the right to make changes to the prices and product(s) described in this document at any time without notice.

This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

Copyright © 2010 OFS FITELE, LLC.
All rights reserved, printed in USA.

OFS
Marketing Communications
osp-160-0910



A Furukawa Company