


## INSTANT 802.3af Adapter

### Instantly Transform any POE Device into a Fully 48V 802.3af Compliant Product

- Allows for longer cable run lengths
- Provides an additional +/-15kV of ethernet isolation for ESD/Surge Protection
- Works seamlessly with Cisco Catalyst and other 802.3af Switches for remote power control applications

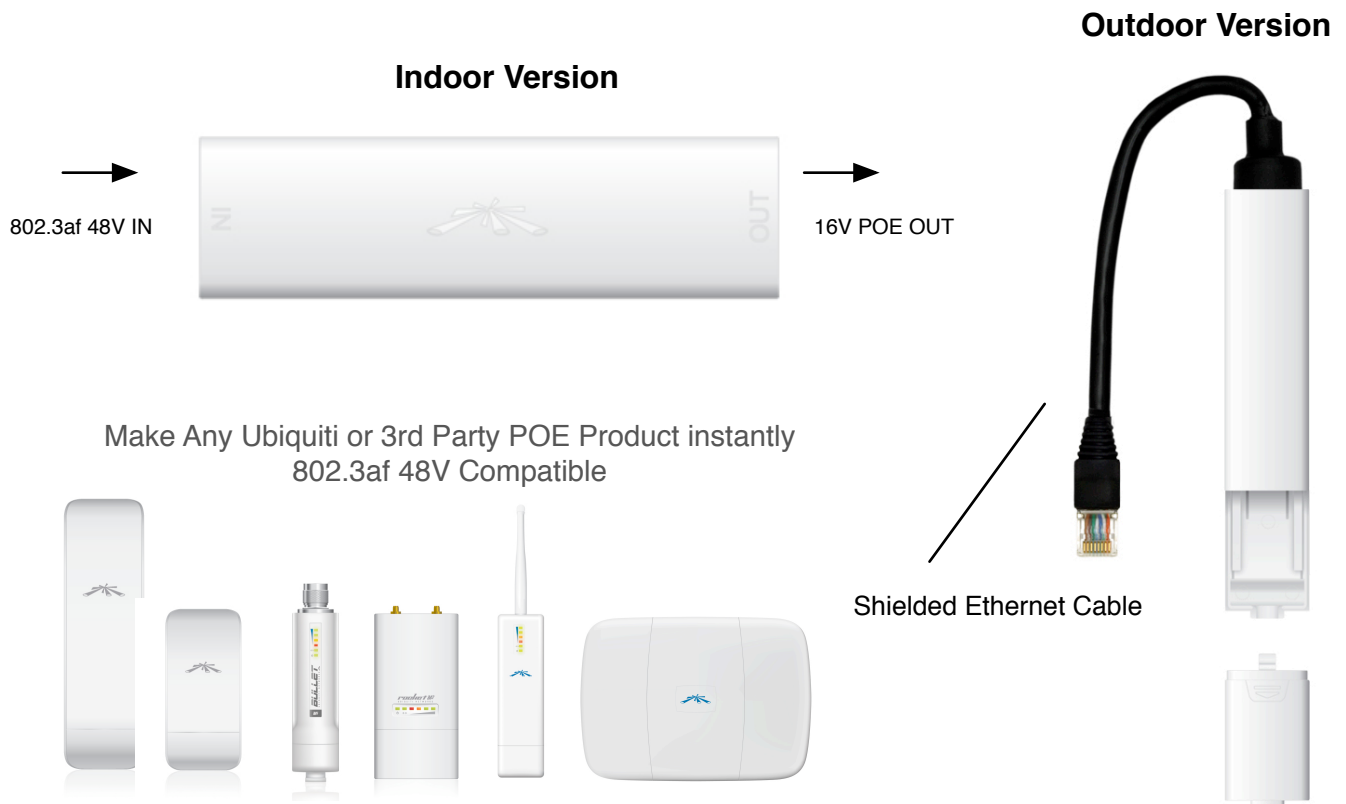

Electrical Information	
Input	48V, 802.3af (with sensing capability)
Output	16V, 0.8A
Output POE method	positive 4,5; return 7,8
Ethernet ESD/Surge Protection	+/-15kV
Indoor Version Information	
Dimensions	27x21.5x93.5 mm
Weight	0.2kg
Temperature Operation	0 to 70C
Outdoor Version Information	
Dimensions	315x25.8x24.8 mm
Weight	0.3kg
Temperature Operation	-30 to +70C
Output Ethernet Cable	Shielded CAT5, 10cm