

300Mbps AV200 Wireless N Starter Kit

TL-WPA281KIT

⦿ Features:

- HomePlug AV standard compliant, high-speed data transfer rate of up to 200Mbps, ideal for HD video or 3D video streaming and online gaming
- 300Mbps wireless N data transfer rate - Extend Wireless Coverage
- Up to 300 meter range over a home's electrical circuit for better performance through walls or across floors
- Plug and Play, no new wires or configuration required, use existing electrical wiring
- Easily connect and secure your network with push button security ("Pair" button, "WPS" button)
- Built-in QoS assures the quality of bandwidth sensitive applications such as voice, video and online games

Supports IGMP managed multicast IP transmission, optimizes IPTV streaming



⦿ Description:


The TP-LINK Wireless N Powerline Extender, TL-WPA281kit extends an Internet connection to every room connected to a home's circuitry. All devices in the room have two options to access the TL-WPA281kit, through wireless or an Ethernet cable. With 200Mbps Powerline link rate and 300Mbps wireless N data transfer rate, it is ideal for bandwidth consuming or latency sensitive applications like video streaming, online gaming and Internet calls. With TL-WPA281kit, Internet can now truly be available everywhere in your home or office.

◎ Specifications:

Hardware Features	
Standards And Protocols	HomePlug AV, IEEE802.3, IEEE802.3u, IEEE802.11n/g/b
Interface	1*10/100Mbps Ethernet Port
Plug Type	EU, US, UK
Button	Pair Button\WiFi (WPS)
LED Indicator	PWR, PLC, ETH, WiFi
Dimensions (Wx Dx H mm)	4.1x 2.3x 1.6 in. (105x 58x 40 mm)
Power Consumption	< 6 W
Range	300 Meters over electrical circuit
Software Features	
Modulation Technology	OFDM
Encryption	Powerline: 128-bit AES Encryption Wireless: WEP, WPA/WPA2, WPA-PSK/WPA2-PSK Encryption
Others	
Certification	CE, FCC, RoHS
Package Contents	Powerline Ethernet Adapter Ethernet cable (RJ45) Resource CD Quick Installation Guide
System Requirements	Windows 2000/XP/2003/Vista, Windows 7, Mac, Linux*
Environment	Operating Temperature: 0°C~40°C (32°F ~104°F) Storage Temperature: -40°C~70°C (-40°F~158°F) Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing

* Utility Supports Windows 2000,XP 32/64 bit, Vista 32/64 bit, Windows 7 32/64 bit

◎ Diagram:

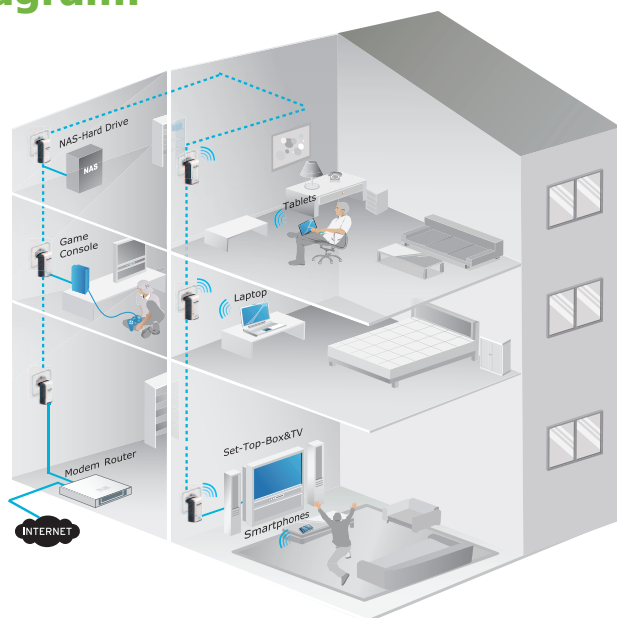

Package:

- TL-PA211 & TL-WPA281
- RJ-45 Ethernet Cable* 2
- Quick Installation Guide
- Resource CD, including:
 - Powerline Ethernet Adapter Utility
 - User Guide
- Other relevant contents